

CO GAS MEASURING SYSTEM

1. PROPERTIES

The Carbon Monoxide CO gas measuring system determines the concentration of CO gas in the air at ambient temperatures of -20° C to +45° C. The housing is made of aluminium and suitable for wall mounting.

The gas measuring system is calibrated with the help of the respective test gas using a potentiometer; there is no or negligible cross-sensitivity to other substances.

Basic processing and output of the measured values (linear output, 4-20 mA) are integrated into the measuring system. Evaluation and further processing of the measured values occur in a downstream device according to the users specifications (for e.g. ventilation system, limit monitor, display, programmable logic controller).

The measuring system offers ranges of 0-300 ppm or 0-500 ppm CO



CO Gas Measuring System

Part no.: 2112B1014

Measuring ranges:

Standard: 0 – 300 ppm

Optional: 0 – 500 ppm

2. DESIGN

The electrochemical sensor is mounted inside aluminium housing on a sensor holder above the diffusion opening. The cable entry is a screwed cable gland (PG11) and is located on the opposite site. In addition, a transmitter containing a signal amplifier and an output of 4-20 mA is arranged in the housing. The transmitter is based on the two-wire system and processes and transmits the measured signals.



CO GAS MEASURING SYSTEM

3. TECHNICAL DATA

Transmitter

| | |
|------------------------------|---|
| Power supply: | Screw terminals |
| Terminal voltage: | Min. 14 Vdc \pm 5% |
| Current: | Approx. 30mA |
| Connections: | 2 polarised screw terminals: 24 Vdc \pm 5% and 4-20mA |
| Potentiometer PZ: | Zero setting (three electrode sensor only) |
| Potentiometer PS: | Span setting |
| Test pins (+) and (-): | Digital voltmeter connection |
| Ambient temperature: | -20° C to +45° C |
| Air pressure: | 900 hPa to 1100 hPa |
| Permissible humidity: | 15-95% relative humidity, non-condensing |
| Output: | 4-20 mA |
| Housing: | Aluminium, red |
| Protection class of housing: | IP 65 |
| Housing weight: | Approx. 500 g |
| Housing dimensions: | Approx. L90 x W85 x H65 mm |
| Connecting cable: | 2x1.5 ² Cu + functional ground, shielded cable |
| Length: | 100 Ω go and return |

Sensor

| | |
|--------------------------|-------------------------|
| Gas access: | By diffusion |
| Expected operating life: | > 6 years in normal use |
| T90 response time: | < 60 seconds |
| Maximum overload: | 1,000ppm |





CO GAS MEASURING SYSTEM

Sensor cross-sensitivity data

| Interfering Gas | Concentration | Reading |
|------------------|---------------|----------|
| CO | 100 ppm | 100 ppm |
| H ₂ S | 25 ppm | 0 ppm |
| SO ₂ | 50 ppm | <0.5 ppm |
| NO ₂ | 50 ppm | -1.0 ppm |
| NO | 50 ppm | 8 ppm |
| CL ₂ | 2 ppm | 0 ppm |
| H ₂ | 100 ppm | 20 ppm |
| CO ₂ | 5000 ppm | 0 ppm |
| NH ₃ | 100 ppm | 0 ppm |
| Ethanol | 2000 ppm | 5 ppm |

4. CONNECTION

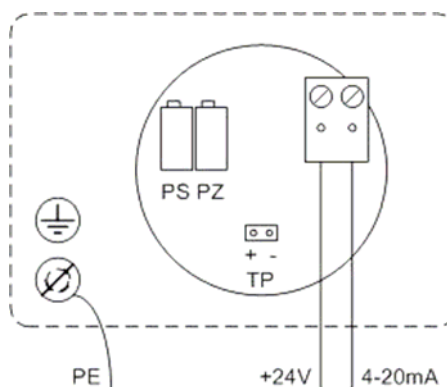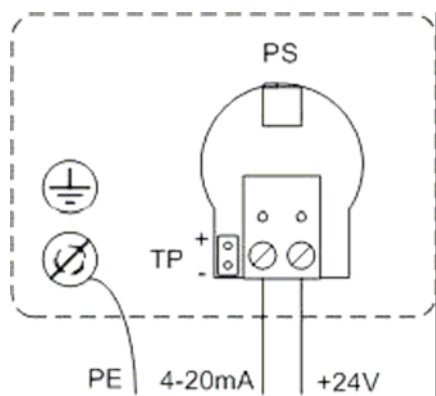

CO GAS MEASURING SYSTEM

Connection diagram. Left: version with two-electrode sensor; right: version with three-electrode sensor; PE, potential earth; PS, potentiometer span for setting the span; PZ, potentiometer zero for setting zero (three-electrode sensor only); TP (+) (-), test pins for connecting the voltmeter; 2 polarized screw terminals for power supply (+24 V DC) and measured signal output (4-20 mA).

The gas measuring system must be connected to any downstream equipment by means of a three-core, shielded cable with maximum 100 Ω cable resistance, including go and return line. Do not lay this line next to a high-tension power cable as there is a danger of radiated interference. The cable must be capable of withstanding the anticipated mechanical, chemical and thermal stresses.

The gas measuring system is connected to the electric circuit (+24 V DC) by means of one of the two polarized screw terminals. The measured data (4-20 mA) is read by means of the second polarized screw terminal. The system earth (potential earth) is connected to the housing.

5. CALIBRATION

The gas measuring system is calibrated manually with the help of two potentiometers (PZ, PS) and two test pins inside the housing. For this, synthetic air and CO test gas are required.

The data contained in this document is believed to be accurate and reliable. The data given is for guidance only. Euro-Gas Management Services Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this datasheet or the information contained in it. Customers should test the sensors under their own conditions to ensure that the sensors are suitable for their own requirements and in accordance with the plans and circumstances of the specific project and any standards/regulations pertaining to the country in which the sensors will be utilised. This datasheet is not intended to form the basis of a contract and in the interest of product improvement, Euro-Gas reserves the right to alter design features and specifications without notice. 08/10

